

V SAT

Ku-band VSAT

FURUNO



Model:
KU-100

Features of Ku-band VSAT system KU-100

- ▶ **Ku-band maritime VSAT antenna system**
- ▶ **Antenna reflector size: 1 m**
- ▶ **Available in both Cross-pol and Co-pol feeds**
- ▶ **Supports ABS (Auto Beam Switching)**
- ▶ **Supports both iDirect and ViaSat modem interface**
- ▶ **Allows for unlimited connection regardless of file size to be handled and duration of connection at a fixed monthly communication rate**
- ▶ **Internet access as well as checking of email account can be done in the same manner as we do at office or home, thanks to always-on connection to the network—no need for dial-up to secure connection**
- ▶ **By adding a VoIP gateway, pre-paid phones for crew calling as well as IP phones for operational calling can be incorporated onboard the vessels**

Equipment List

Standard

Above Deck Equipment

Antenna Unit	KU-100AT
--------------	----------

Below Deck Equipment

Antenna Control Unit	KU-100AC
----------------------	----------

Antenna cable*

*Selectable from	8D-FB-CV 30M 8D-FB-CV 50M
------------------	------------------------------



Specifications

Product Name		KU-BAND ANTENNA	
Antenna Unit KU-100AT			
Antenna Diameter		Dish size: 1.0 m	
Antenna Gain	TX	41.8 dBi (14.25 GHz)	
	RX	40.6 dBi (12.50 GHz)	
Polarization		Co-pol and Cross-pol	
Transmitting Frequency		14.0-14.5 GHz (Standard)	13.75-14.5 GHz (option)*
Receiving Frequency		10.7-12.75 GHz	
RF Package	TX	8 W BUC (Block Up Converter)	8 W Extended BUC (option)
	RX	Wideband LNA	
GPS Receiver		Incorporated	
Ship's Motion	Roll	±30°/7 sec	
	Pitch	±10°/5 sec	
	Yaw	±4°/20 sec	
	Rate of Turn	±6°/1 sec, 1°/sec ²	
Environment			
Temperature	Operational: -25°C to +55°C		
	Storage: -40°C to +70°C		
Relative humidity	Up to 93 % at 40°C		
Waterproofing	IP56		
EMC	IEC 60945 Ed. 4 2002-08		
Shock	IEC 60068-2-27		
Vibration	IEC 60945 Ed. 4 2002-08		
Wind speed	60 m/sec Max.		

Antenna Unit

KU-100AT



175 kg 385.9 lb



Antenna Control Unit


KU-100AC

8 kg 17.64 lb



Antenna Control Unit KU-100AC	
Interface	Antenna Interface (Power, L-band with control), TRX IF (for Modem), Ethernet, Heading, RS232 (for maintenance)
Power Supply	100-240 VAC (50, 60 Hz) 300 W
Environment	
Temperature	Operational: 0°C to +55°C
	Storage: -40°C to +70°C
Relative humidity	Up to 93 % at 40°C
EMC	IEC 60945 Ed. 4 2002-08
Shock	IEC 60068-2-27
Vibration	IEC 60945 Ed. 4 2002-08

VSAT System Configuration

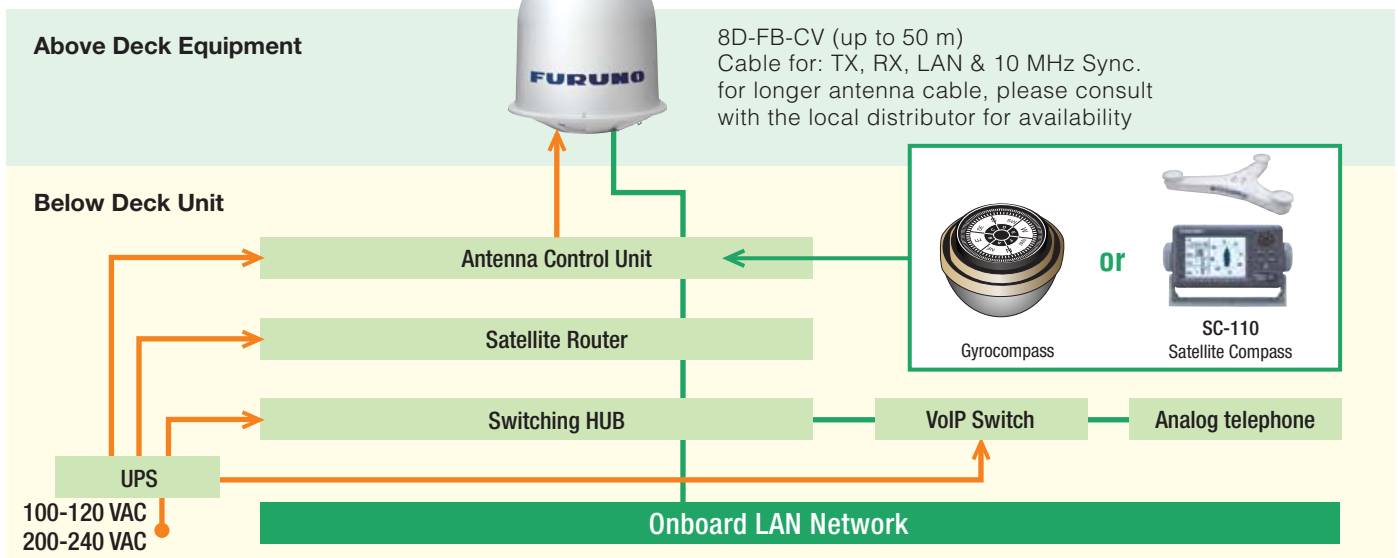

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO ELECTRIC CO., LTD.
Nishinomiya, Hyogo, Japan
www.furuno.com

FURUNO U.S.A., INC.
Camas, Washington, U.S.A.
www.furunousa.com

FURUNO (UK) LIMITED
Havant, Hampshire, U.K.
www.furuno.co.uk

FURUNO NORGE A/S
Ålesund, Norway
www.furuno.no

FURUNO DANMARK A/S
Hvidovre, Denmark
www.furuno.dk

FURUNO SVERIGE AB
Västra Frölunda, Sweden
www.furuno.se

FURUNO FINLAND OY
Espoo, Finland
www.furuno.fi

FURUNO POLSKA Sp. z o.o.
Gdynia, Poland
www.furuno.pl

FURUNO DEUTSCHLAND GmbH
Rellingen, Germany
www.furuno.de

FURUNO FRANCE S.A.S.
Bordeaux-Mérignac, France
www.furuno.fr

FURUNO ESPAÑA S.A.
Madrid, Spain
www.furuno.es

FURUNO ITALIA S.r.l.
Genoa, Italy

FURUNO HELLAS S.A.
Glyfada, Greece
www.furuno.gr

FURUNO (CYPRUS) LTD
Limassol, Cyprus
www.furuno.com.cy

FURUNO EURUS LLC
St. Petersburg, Russian Federation
www.furuno.com.ru

FURUNO SHANGHAI CO., LTD.
Shanghai, China
www.furuno.com/cn

FURUNO KOREA CO., LTD.
Busan, Korea
RICO (PTE) LTD
Singapore
www.rico.com.sg